VP 1000


Water Driven Gas Freeing Fan



Description

The VP1000 is a high performance, deep penetration, water driven fan, constructed using high grade 316 stainless steel. This non-sparking fan is suitable for use on all types of vessels. It provides gas freeing to allow for change of cargo, through to providing health & safety requirements and tank maintenance





Technical Information	
Drive media	Water
Max height	572mm
Max width	345mm
Weight	27kg
Water Connection	Multiple options available
Max Air Flow	10540m ³ /hr
Max Static Pressure	1790Pa
Max Water Flow Requirement	27.0m³/hr
Operating Pressures	2.0 – 12.0 kg/cm²
Deck Opening	Optimum To suit standard Ø318mm

Key Features

- Designed and Class Approved for use in hazardous areas
- Supply or Extract mode by simple reversal of water supply
- Integral 'Direct In-Line' drive; no gearbox to maintain or fail
- Non-Sparking (ATEX approved)
- Can operate at low pressures
- Can be supplied for horizontal mounting
- High airflow throughput
- High static pressure
- Efficient motors
- Marine grade materials
- Fail-safe bleed tube to indicate seal failure
- Fully Type Approved by Class Societies worldwide










Water Driven Gas Freeing Fan



PRODUCT DIMENSIONS:

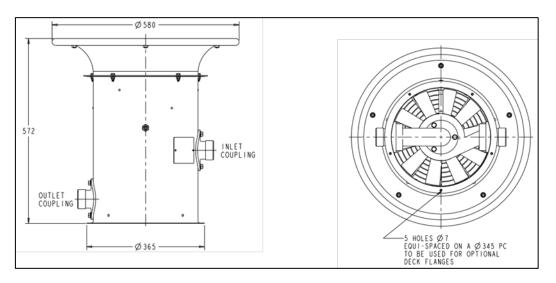

PERFORMANCE GRAPHS:

